

Chapter 1: roadmap

1.1 What *is* the Internet?

1.2 Network edge

- end systems, access networks, links

1.3 Network core

- circuit switching, packet switching, network structure

1.4 Delay, loss and throughput in packet-switched networks

1.5 Protocol layers, service models


1.6 Networks under attack: security

1.7 History

Introduction 1-1

The Network Core

- mesh of interconnected routers
- *the fundamental question*: how is data transferred through net?
 - ❖ circuit switching: dedicated circuit per call: telephone net
 - ❖ packet-switching: data sent thru net in discrete "chunks"

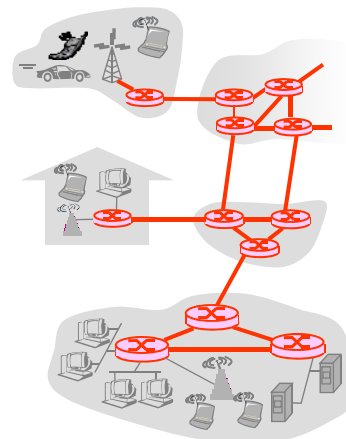


Introduction 1-2

Network Core: Circuit Switching

End-end resources reserved for "call"

- link bandwidth, switch capacity
- dedicated resources: no sharing
- circuit-like (guaranteed) performance
- call setup required

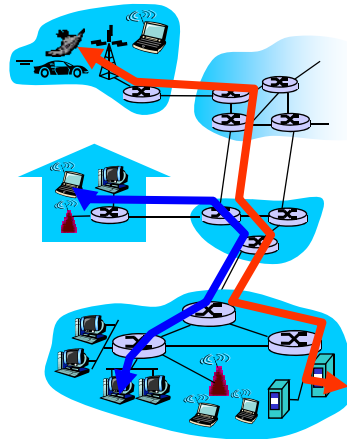

Introduction 1-3

Network Core: Circuit Switching

network resources
(e.g., bandwidth)


divided into "pieces"

- pieces allocated to calls
- resource piece *idle* if not used by owning call (*no sharing*)

- dividing link bandwidth into "pieces"
 - ❖ frequency division
 - ❖ time division

Introduction 1-4

Circuit Switching: FDM and TDM

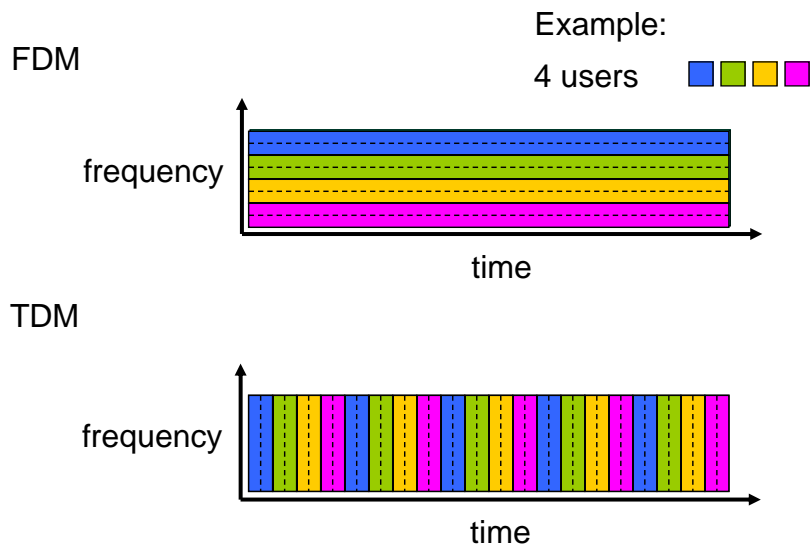

Numerical example

- How long does it take to send a file of 640,000 bits from host A to host B over a circuit-switched network?
 - ❖ All links are 1.536 Mbps
 - ❖ Each link uses TDM with 24 slots/sec
 - ❖ 500 msec to establish end-to-end circuit


Let's work it out!

Network Core: Packet Switching

each end-end data stream
divided into *packets*

- ❑ user A, B packets *share* network resources
- ❑ each packet uses full link bandwidth
- ❑ resources used *as needed*

Bandwidth division into "pieces"
Dedicated allocation
Resource reservation




resource contention:

- ❑ aggregate resource demand can exceed amount available
- ❑ congestion: packets queue, wait for link use
- ❑ store and forward: packets move one hop at a time
 - ❖ Node receives complete packet before forwarding

Introduction 1-7


Packet Switching: Statistical Multiplexing

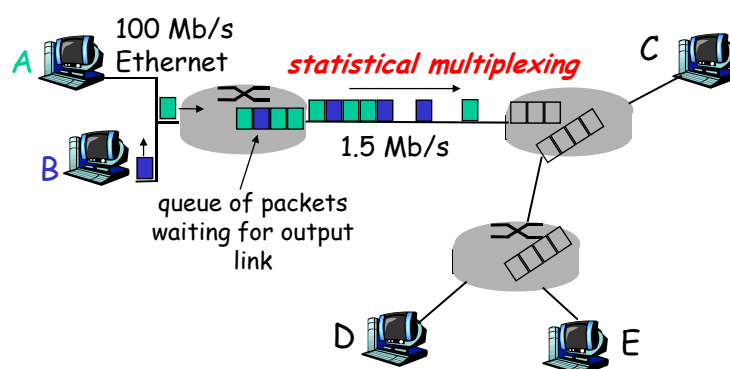

Sequence of A & B packets does not have fixed pattern,
bandwidth shared on demand → **statistical multiplexing**.
TDM: each host gets same slot in revolving TDM frame.

Introduction 1-8

Packet-switching: store-and-forward




- ❑ takes L/R seconds to transmit (push out) packet of L bits on to link at R bps
 - ❑ *store and forward*: entire packet must arrive at router before it can be transmitted on next link
 - ❑ delay = $3L/R$ (assuming zero propagation delay) } more on delay shortly ...
- Example:**
- ❑ $L = 7.5$ Mbits
 - ❑ $R = 1.5$ Mbps
 - ❑ transmission delay = 15 sec

Introduction 1-9

Packet switching versus circuit switching

Packet switching allows more users to use network!

- ❑ 1 Mb/s link
- ❑ each user:
 - ❖ 100 kb/s when "active"
 - ❖ active 10% of time
- ❑ *circuit-switching*:
 - ❖ 10 users
- ❑ *packet switching*:
 - ❖ with 35 users, probability > 10 active at same time is less than .0004

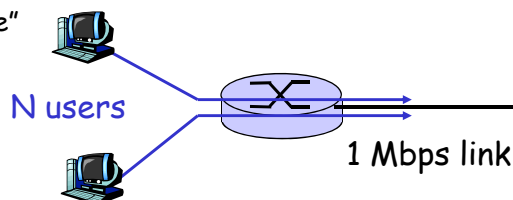

Q: how did we get value 0.0004?

Introduction 1-10

Packet switching versus circuit switching

Is packet switching a "slam dunk winner?"


- great for bursty data
 - ❖ resource sharing
 - ❖ simpler, no call setup
- **excessive congestion:** packet delay and loss
 - ❖ protocols needed for reliable data transfer, congestion control
- **Q: How to provide circuit-like behavior?**
 - ❖ bandwidth guarantees needed for audio/video apps
 - ❖ still an unsolved problem (chapter 7)

Q: human analogies of reserved resources (circuit switching) versus on-demand allocation (packet-switching)?

Introduction 1-11


Internet structure: network of networks

- roughly hierarchical
- **at center: "tier-1" ISPs** (e.g., Verizon, Sprint, AT&T, Cable and Wireless), national/international coverage
 - ❖ treat each other as equals

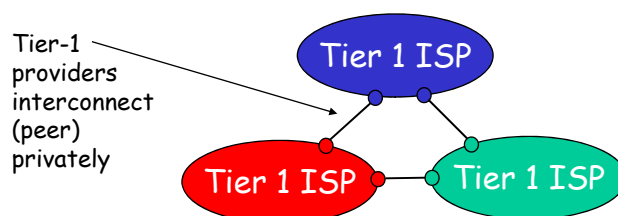

Introduction 1-12


Tier-1 ISP: e.g., Sprint

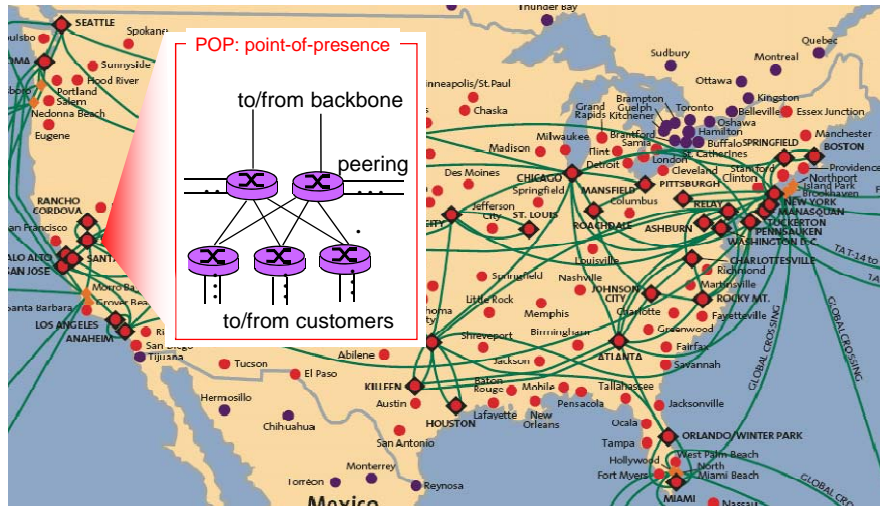

Introduction 1-13

Internet structure: network of networks

- "Tier-2" ISPs: smaller (often regional) ISPs
 - ❖ Connect to one or more tier-1 ISPs, possibly other tier-2 ISPs

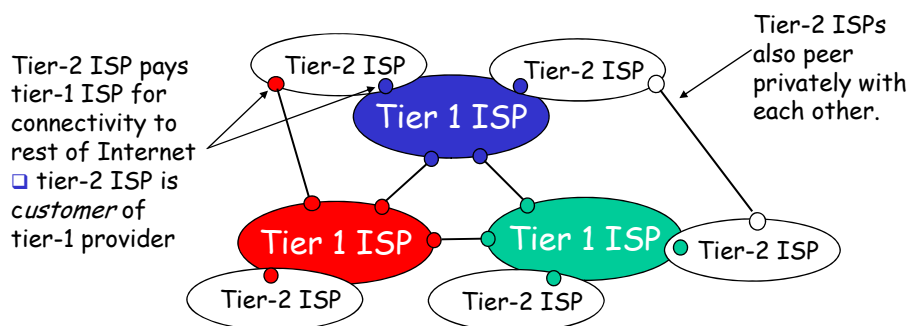


Introduction 1-14

Internet structure: network of networks


□ "Tier-3" ISPs and local ISPs

- ❖ last hop ("access") network (closest to end systems)

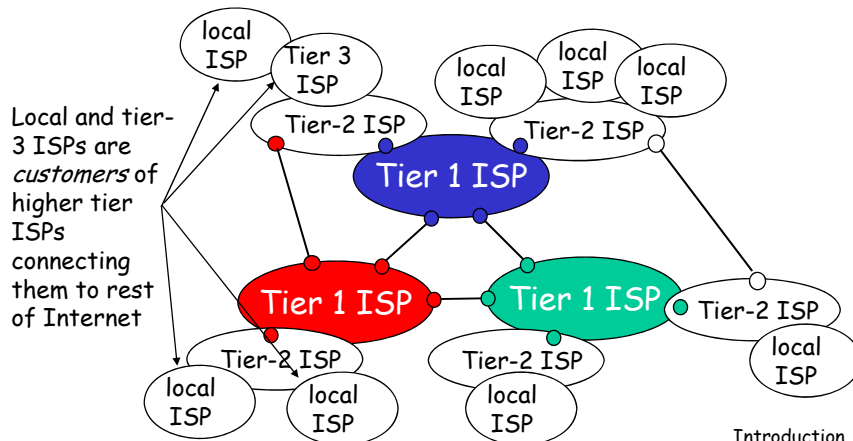

Internet structure: network of networks

□ a packet passes through many networks!

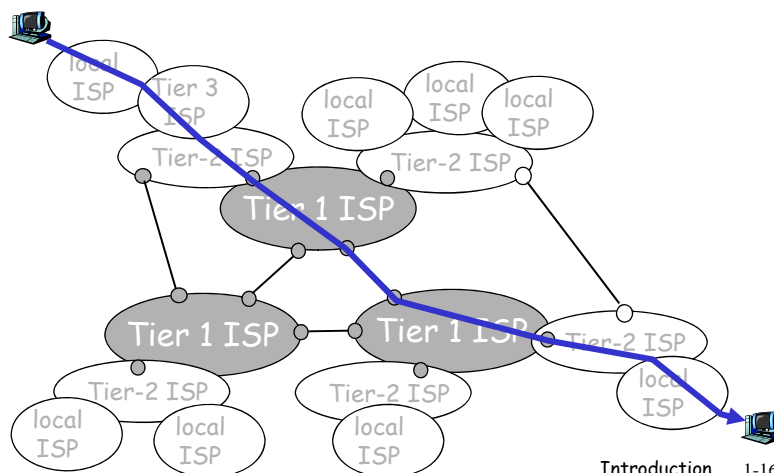

Chapter 1: roadmap

1.1 What *is* the Internet?

1.2 Network edge

- end systems, access networks, links

1.3 Network core

- circuit switching, packet switching, network structure

1.4 Delay, loss and throughput in packet-switched networks

1.5 Protocol layers, service models

1.6 Networks under attack: security


1.7 History

Introduction 1-17

How do loss and delay occur?

packets *queue* in router buffers

- packet arrival rate to link exceeds output link capacity
- packets queue, wait for turn

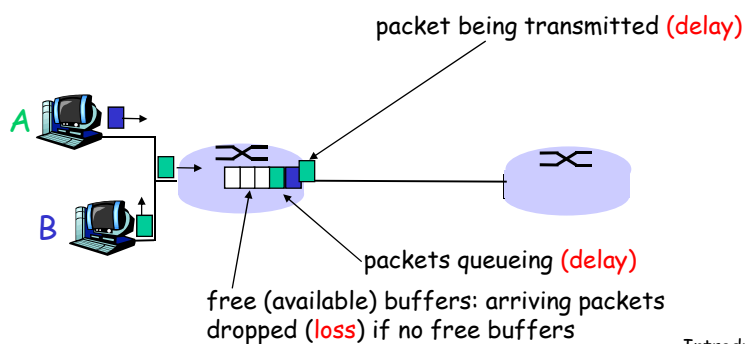

Introduction 1-18


Four sources of packet delay

1. nodal processing:

- ❖ check bit errors
- ❖ determine output link

2. queueing

- ❖ time waiting at output link for transmission
- ❖ depends on congestion level of router

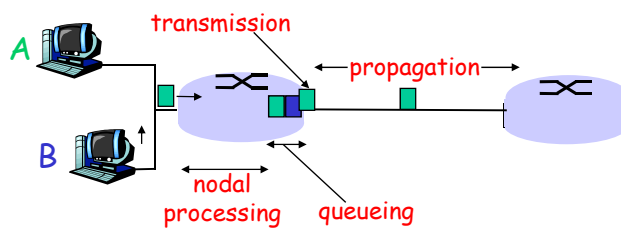

Introduction 1-19

Delay in packet-switched networks


3. Transmission delay:

- ❑ R = link bandwidth (bps)
- ❑ L = packet length (bits)
- ❑ time to send bits into link = L/R

4. Propagation delay:


- ❑ d = length of physical link
- ❑ s = propagation speed in medium ($\sim 2 \times 10^8$ m/sec)
- ❑ propagation delay = d/s

Note: s and R are very different quantities!

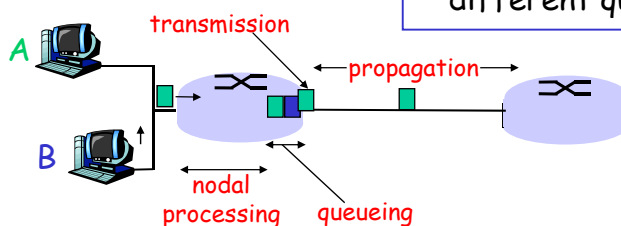

Introduction 1-20


Caravan analogy

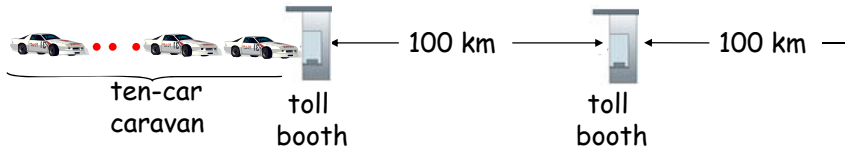

- cars "propagate" at 100 km/hr
- toll booth takes 12 sec to service car (transmission time)
- car~bit; caravan ~ packet
- Q: How long until caravan is lined up before 2nd toll booth?
- Time to "push" entire caravan through toll booth onto highway = $12 \times 10 = 120 \text{ sec}$
- Time for last car to propagate from 1st to 2nd toll booth: $100 \text{ km} / (100 \text{ km/hr}) = 1 \text{ hr}$
- A: 62 minutes

Introduction 1-21

Caravan analogy (more)



- Cars now "propagate" at 1000 km/hr
- Toll booth now takes 1 min to service a car
- Q: Will cars arrive to 2nd booth before all cars serviced at 1st booth?
- Yes! After 7 min, 1st car at 2nd booth and 3 cars still at 1st booth.
- 1st bit of packet can arrive at 2nd router before packet is fully transmitted at 1st router!
 - ❖ See Ethernet applet at AWL Web site

Introduction 1-22

Nodal delay

$$d_{\text{nodal}} = d_{\text{proc}} + d_{\text{queue}} + d_{\text{trans}} + d_{\text{prop}}$$


- d_{proc} = processing delay
 - ❖ typically a few microseconds or less
- d_{queue} = queuing delay
 - ❖ depends on congestion
- d_{trans} = transmission delay
 - ❖ = L/R , significant for low-speed links
- d_{prop} = propagation delay
 - ❖ a few microseconds to hundreds of msecs

Introduction 1-23

Queueing delay (revisited)

- R = link bandwidth (bps)
- L = packet length (bits)
- a = average packet arrival rate

traffic intensity = La/R

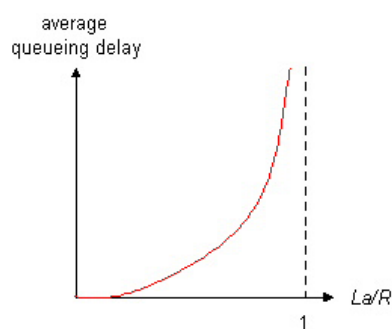


- $La/R \sim 0$: average queueing delay small
- $La/R \rightarrow 1$: delays become large
- $La/R > 1$: more "work" arriving than can be serviced, average delay infinite!

Introduction 1-24

"Real" Internet delays and routes

- What do "real" Internet delay & loss look like?
- **Traceroute program:** provides delay measurement from source to router along end-end Internet path towards destination. For all i :
 - ❖ sends three packets that will reach router i on path towards destination
 - ❖ router i will return packets to sender
 - ❖ sender times interval between transmission and reply.



Introduction 1-25

"Real" Internet delays and routes

traceroute: gaia.cs.umass.edu to www.eurecom.fr

Three delay measurements from gaia.cs.umass.edu to cs-gw.umass.edu


```

1 cs-gw (128.119.240.254) 1 ms 1 ms 2 ms
2 border1-rt-fa5-1-0.gw.umass.edu (128.119.3.145) 1 ms 1 ms 2 ms
3 cht-vbns.gw.umass.edu (128.119.3.130) 6 ms 5 ms 5 ms
4 jn1-at1-0-0-19.wor.vbns.net (204.147.132.129) 16 ms 11 ms 13 ms
5 jn1-so7-0-0-0.wae.vbns.net (204.147.136.136) 21 ms 18 ms 18 ms
6 abilene-vbns.abilene.ucaid.edu (198.32.11.9) 22 ms 18 ms 22 ms
7 nycm-wash.abilene.ucaid.edu (198.32.8.46) 22 ms 22 ms 22 ms
8 62.40.103.253 (62.40.103.253) 104 ms 109 ms 106 ms ← trans-oceanic link
9 de2-1.de1.de.geant.net (62.40.96.129) 109 ms 102 ms 104 ms
10 de.fr1.fr.geant.net (62.40.96.50) 113 ms 121 ms 114 ms
11 renater-gw.fr1.fr.geant.net (62.40.103.54) 112 ms 114 ms 112 ms
12 nio-n2.cssi.renater.fr (193.51.206.13) 111 ms 114 ms 116 ms
13 nice.cssi.renater.fr (195.220.98.102) 123 ms 125 ms 124 ms
14 r3t2-nice.cssi.renater.fr (195.220.98.110) 126 ms 126 ms 124 ms
15 eurecom-valbonne.r3t2.ft.net (193.48.50.54) 135 ms 128 ms 133 ms
16 194.214.211.25 (194.214.211.25) 126 ms 128 ms 126 ms
17 *** ← *means no response (probe lost, router not replying)
18 ***
19 fantasia.eurecom.fr (193.55.113.142) 132 ms 128 ms 136 ms
  
```

Introduction 1-26

Packet loss


- ❑ queue (aka buffer) preceding link in buffer has finite capacity
- ❑ packet arriving to full queue dropped (aka lost)
- ❑ lost packet may be retransmitted by previous node, by source end system, or not at all

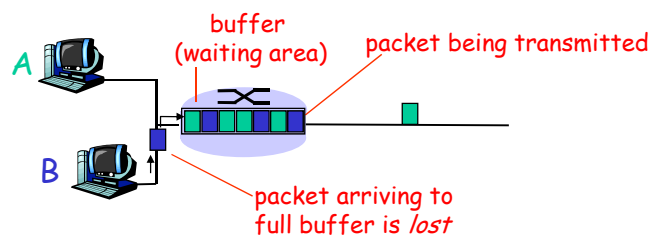

Introduction 1-27

Throughput


- ❑ **throughput**: rate (bits/time unit) at which bits transferred between sender/receiver
 - ❖ *instantaneous*: rate at given point in time
 - ❖ *average*: rate over longer period of time

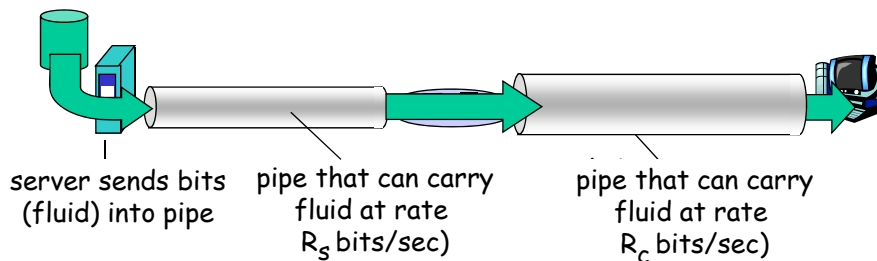


Introduction 1-28

Throughput (more)

- $R_s < R_c$ What is average end-end throughput?



- $R_s > R_c$ What is average end-end throughput?




bottleneck link

link on end-end path that constrains end-end throughput

Introduction 1-29

Throughput: Internet scenario

- per-connection end-end throughput: $\min(R_c, R_s, R/10)$
- in practice: R_c or R_s is often bottleneck

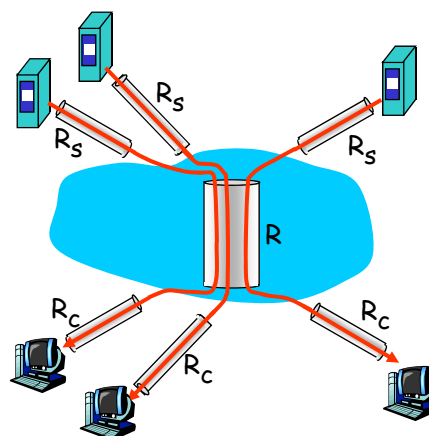

10 connections (fairly) share backbone bottleneck link R bits/sec

Introduction 1-30